



CONVEYORS FOR STRETCH WRAPPING, STRAPPING AND ROBOTIC CELLS

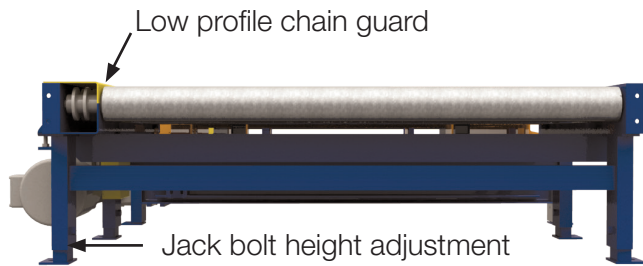

END VIEW

Conveyors are designed for smooth transition

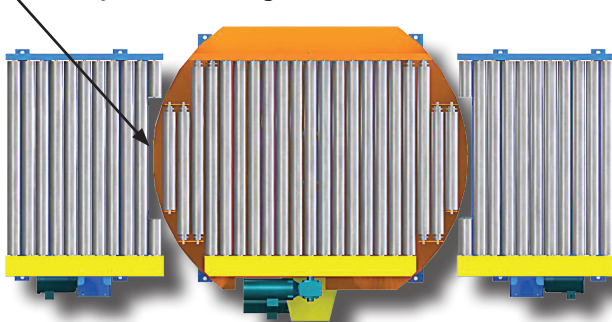

TOP VIEW

ROLLER CONVEYOR SPECIFICATIONS

- 6" X 8.2# structural channel side frames
- 3-1/2" Dia rollers with 11/16" hex axles on 4" centers
- ABEC-1 rated precision bearings
- 1/2 hp Baldor brakemotor
- Boston reducer

TURN TABLE SPECIFICATIONS

- 1/2" table top
- 1-1/2 hp inverter duty motor
- Double "C" face brake
- Powered transition rollers on conveyor deck

KEY FEATURES

- Load capacity of up to 4,000 lbs
- Sculpted conveyor ends for enhanced pallet transition capability
- Low profile chain guard for maximum access to pallet
- Jack bolt height adjustment
- Standard and custom sizes available

P.O. Box 352 ■ Alpena, Michigan 49707  
 Phone 989.358.7000  
 Fax 989.358.7020  
 dist@omni.com  
 www.omni.com